



PRODUCT SUBMITTAL



Series 200 Ladder Mesh (For Single Wyth Wall)

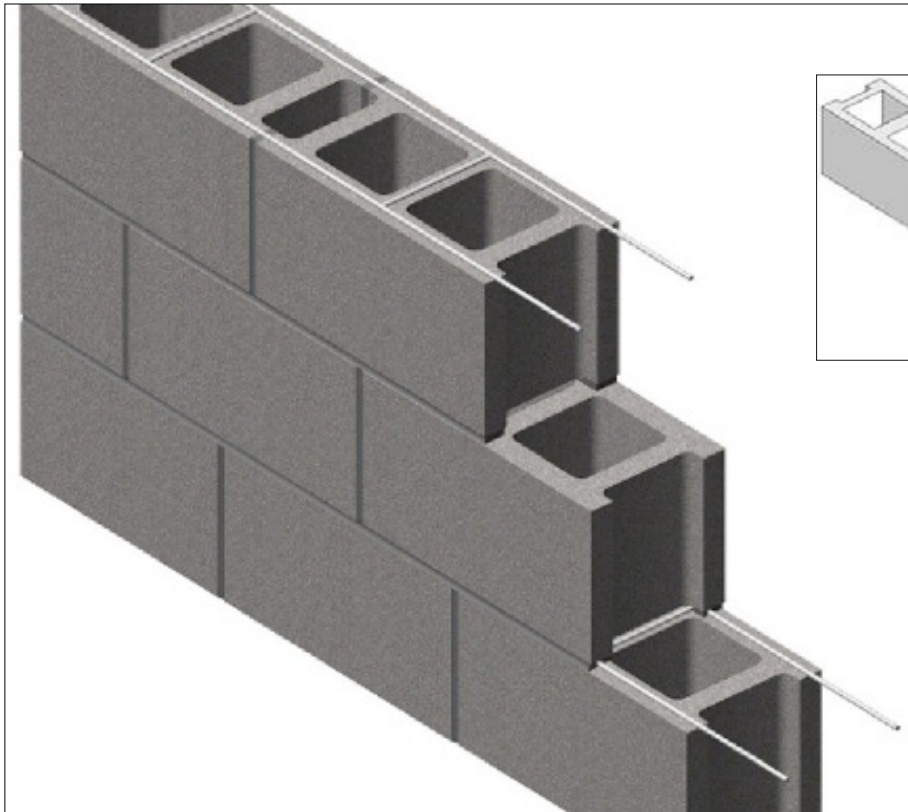

16" O.C. cross rods allow core clearance.

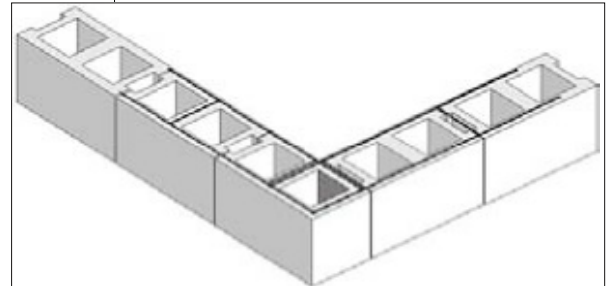

PREFABRICATED CORNER

Corners & Tee's
32" Standard Lengths



PREFABRICATED TEE

MATERIAL CONFORMANCE		SIZES / FINISHES						
<p>ASTM A82 / A82M - (Cold drawn steel wire) Tensile Strength - 80,000 psi Yield Point - 70,000 psi</p> <p>ASTM A951 / A951M-06 - (Standard Specification for Steel Wire for Masonry Joint Reinforcement)</p> <p>ACI / ASCE 530 - (Building code requirements for masonry structures Mill Galvanized / Zinc Coating: ASTM A641 / A641M (0.10 Oz per sq ft) Hot Dip Galvanized after fabrication / Zinc Coating: ASTM A153 / A153M-B2 (1.50 oz per sq ft) Stainless Steel ASTM 580 / 580M Type 304 (Type 316 available on special orders)</p>	<p>WIRE Recycled Content: Mill Galvanized & Hot Dip, 87% Post-Consumer 13% Post Industrial / Pre-Consumer, Stainless Steel, 60% Post Consumer V O C Content - 0%</p>	WIRE SIZE:		Side Rods		Cross Rods		
		Standard		9 Gauge (.148 in)		9 Gauge		
		Heavy Duty		3/16" (.187 in)		9 Gauge		
		Extra Heavy Duty		3/16" (.187 in)		3/16"		
CMU SIZE:		4"	6"	8"	10"	12"	14"	16"
FINISHES:		Mill Galvanized		Hot Dip Galvanized		Stainless Steel		



Corporate Office: 400 Rountree Rd Charlotte, NC 28217
TEL: (800) 849-6722 FAX: (704) 525-3761
Mailing Address: P.O. Box 240988 Charlotte, NC 28224



www.wirebond.com

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113
TEL: (800) 441-8359 FAX: (901) 775-9449
Mailing Address: P.O. Box 13124 Memphis, TN 38113