


PRODUCT SUBMITTAL

WIRE-BOND

1000 Type I Weld-On Anchor

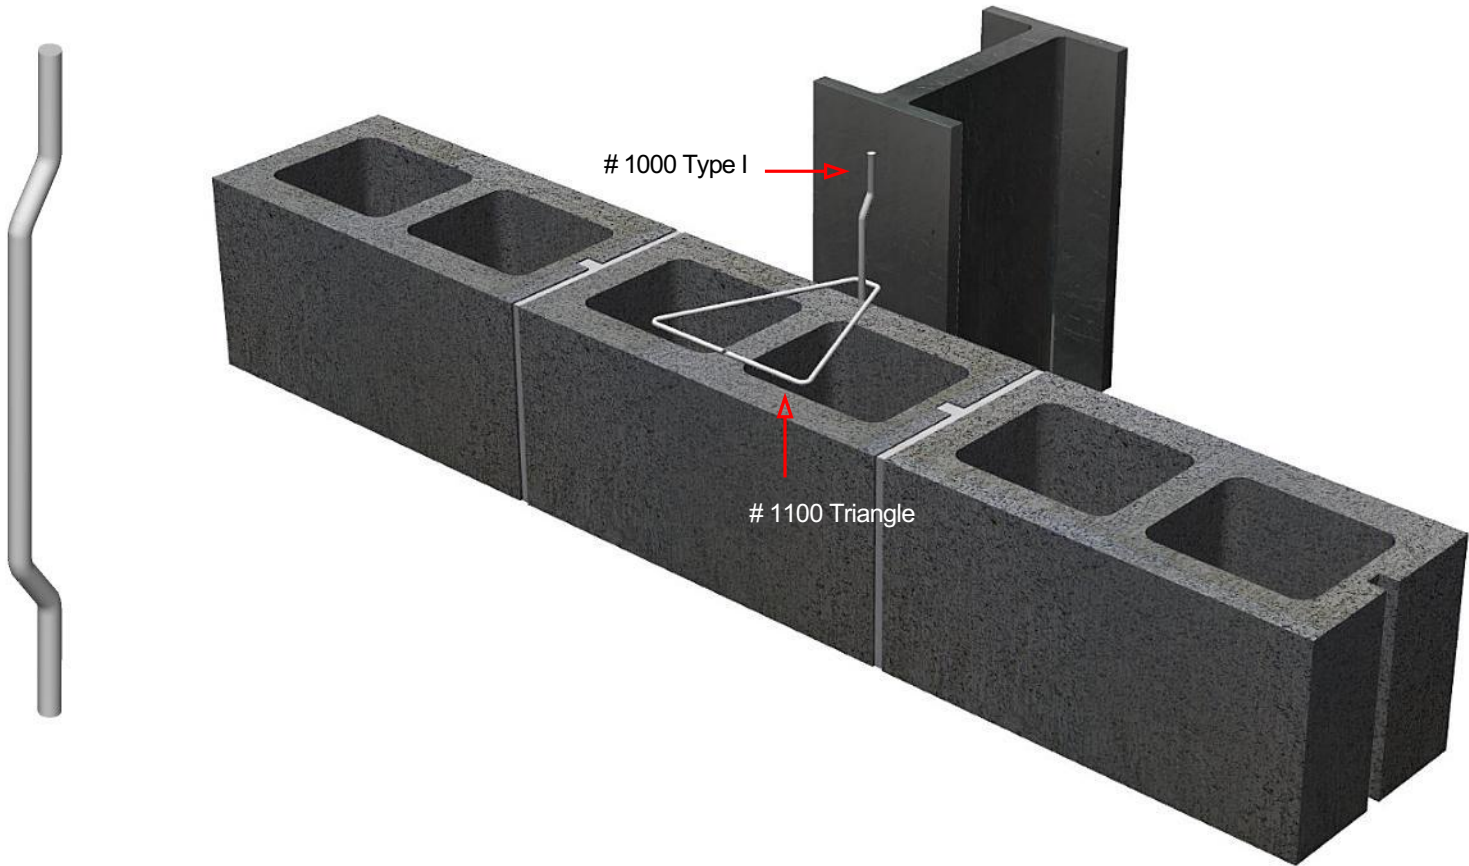

MATERIAL CONFORMANCE

ASTM A82 / A82M - (Cold drawn steel wire)
 Tensile Strength - 80,000 psi
 Yield Point - 70,000 psi
ASTM A951 / A951M-06 - (Standard Specification for Steel Wire for Masonry Joint Reinforcement)
ACI / ASCE 530 - (Building code requirements for masonry structures)
 Mill Galvanized / Zinc Coating: **ASTM A641 / A641M (0.10 oz per sq ft)**
 Hot Dip Galvanized after fabrication / Zinc Coating
ASTM A153 / A153M-B2 (1.50 oz per sq ft)
 Stainless Steel **ASTM 580 / ASTM 580M Type 304** (Type 316 available on special order)

Recycled Content:
 Mill Galvanized & Hot Dipped,
 82.8% Post-Consumer
 17% Post Industrial / Pre-Consumer,

Stainless Steel,
 60% Post Consumer
 V O C Content - 0%



SIZES / FINISHES

1000 Type I Weld-On:

- 1/4" dia. x 5" 1/4" dia. x 9"

1100 Triangle:

- 3/16" 1/4"
 3" x 3" 4" x 4" 5" x 5" 7" x 7" 9" x 9"

FINISH:

- Mill Galvanized Hot Dip Galvanized Stainless Steel



www.wirebond.com

MASONPRO, Inc.
 43300 Seven Mile Road
 Northville, MI 48167
 1-800-659-4731
www.masonpro.com