
PRODUCT SUBMITTAL



2102 Dovetail Triangular Tie

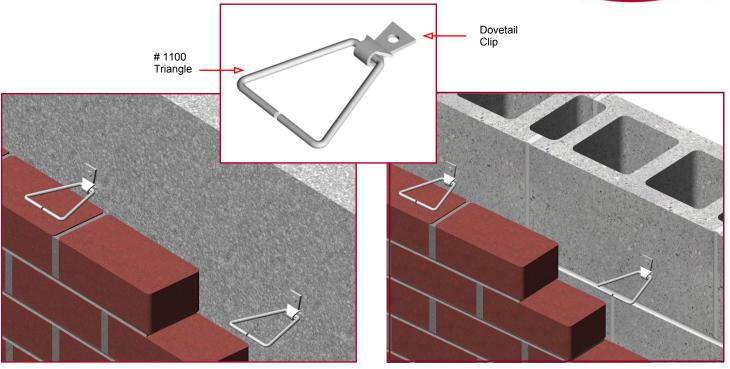

MATERIAL CONFORMANCE

SHEET METAL - (Carbon Steel) ASTM A1008 / A1008M

Mill Galvanized / Zinc Coating: ASTM A641 / A641M (0.10 0z per sq ft)

Hot Dip Galvanized after fabrication / Zinc Coating ASTM A153 / A153M-B2 (1.50 oz per sq ft)

Stainless Steel (WIRE) **ASTM A580 / ASTM A580M**Stainless Steel (SHEET METAL) **ASTM A167 Type 304**(Type 316 available on special order)

ASTM A82 / A82M - (Cold drawn steel wire)

Tensile Strength - 80,000 psi Yield Point - 70,000 psi

ACI / ASCE 530 - (Building code requirements for masonry structures)

Recycled Content:

Mill Galvanized & Hot Dip, 82.8% Post-Consumer 17% Post Industrial / Pre -Consumer



Stainless Steel, 60% Post Consumer V O C Content - 0%

SIZES / FINISHES

3/16" dia.

Dovetail Clip:

12ga x 1" with 5/16" Hole

1100 Triangle Diameter:

1100 Triangle Size:

3" x 3" 6" x 6" 4" x 4" 7" x 7" 5" x 5" 7" x 9"

Finish:

Mill Galvanized Hot Dip Stainless Steel



Distributed by:

MasonAccess.com