

# PRODUCT SUBMITTAL



## PTA #4301 (Partition Top Anchor)


### PTA #4301


Average  
Shear Load:  
4,400 (lbs)



### PTA Tube

PTA tube with expansion filler is placed over the anchor to allow deflection. Joint is filled with mortar, fully surrounding the tube.

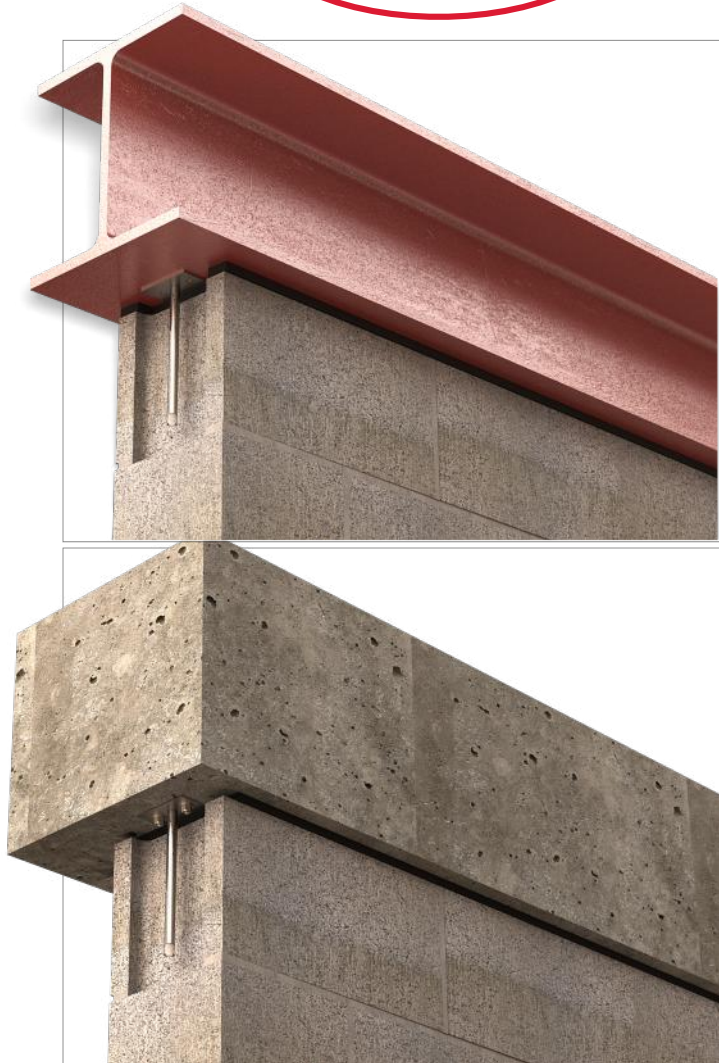

| MATERIAL CONFORMANCE   | SIZES / FINISHES   |
|--|--|
| <p><b>SHEET METAL</b> - (Carbon Steel) <b>ASTM A1008 / A1008M</b><br/> <b>ROD: ASTM A82 / A82M</b></p> <p>Hot Dip Galvanized after fabrication / Zinc Coating<br/> <b>ASTM A153 / A153M-B2 (1.50 oz per sq ft)</b><br/>                     Stainless Steel <b>ASTM 580 / ASTM 580M</b> Type 304<br/> <b>TUBE: Clear Butyrate ASTM D542 , D148 , D696 , D257</b></p> <p><b>Recycled Content:</b><br/>                     Mill Galvanized &amp; Hot Dipped,<br/>                     82.8% Post-Consumer<br/>                     17% Post Industrial / Pre-Consumer,</p> <p>Stainless Steel,<br/>                     60% Post Consumer<br/>                     V O C Content - 0%</p>  | <p><b>#4301 Plate:</b><br/>                     12 gauge x 2" x 3"<br/>                     1/4" thick x 2" x 3"</p> <p><b>ROD:</b><br/>                     3/8" x 7"</p> <p><b>PTA TUBE:</b><br/>                     Fits over Rod</p> <p><b>FINISHES:</b>      <b>Hot Dip Galvanized</b>      <b>Stainless Steel</b></p> |

**Corporate Office:** 400 Rountree Rd Charlotte, NC 28217  
 TEL: (800) 849-6722 FAX: (704) 525-3761

**Mailing Address:** P.O. Box 240988 Charlotte, NC 28224



[www.wirebond.com](http://www.wirebond.com)

**Memphis Plant:** 2365 Harbor Ave. Memphis, TN 38113  
 TEL: (800) 441-8359 FAX: (901) 775-9449

**Mailing Address:** P.O. Box 13124 Memphis, TN 38113